

V10 CLEVIS SELF-LOCKING HOOKS SERIES

The V10 Clevis Self-locking Hook provides a unique safety feature that allows the user to manually unhook the load themselves when they want the load released. Italian made, and quenched and tempered before proof testing, this self-locking hook meets or exceeds OSHA, Government, NACM, and ASTM specs. It comes in a blue powder coat finish.

Suited for heavy duty lifting applications and has a Working Load Limit of up to 42,700 lbs.

FEATURES

- Grade 100
- Premium fine grain alloy steel
- Made in Italy
- Quenched and tempered before proof testing
- Blue powder coat finish
- Meets or exceeds OSHA, Government, NACM, and ASTM specs
- Self-locking hook for added safety - hook only opens when the latch is pressed



V10 CLEVIS SELF-LOCKING HOOKS SERIES

GRADE

- 100

FINISH

- Blue Powder Coat Finish

STANDARDS

- Meets or exceeds OSHA, Government, NACM, and ASTM specs

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Italy

HOOK TYPE

- Self-locking Hook

APPLICATION

- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel



[WWW.KITO.CA](http://www.kito.ca) | 1.888.322.KITO (5486)


All specifications, dimensions and drawings are available at www.kito.ca, or call our Customer Service staff for friendly and expert advice on models and options.

2

V10 ALLOY CHAIN
ACCESSORIES

V10 CLEVIS SELF-LOCKING HOOKS SERIES

DIAGRAM DRAWINGS

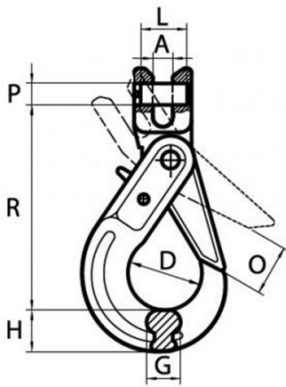

V10 CLEVIS SELF-LOCKING HOOKS SERIES

PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim A	Dim D	Dim G	Dim H	Dim O	Dim P x L	Dim R	Lbs. Per Ea.	Working Load Limit (Lbs.)
8998100	CRFX06	7/32	6	0.264	1.378	0.630	0.807	1.102	0.29 x 0.65	3.700	1.10	2700
8998200	CRFX07	9/32 - 5/16	7-8	0.335	1.713	0.787	1.024	1.339	0.38 x 0.91	4.843	2.12	5700
8998400	CRFX10	3/8	10	0.472	2.205	0.965	1.181	1.772	0.49 x 1.16	5.650	3.53	8800
8998600	CRFX13	1/2	13	0.591	2.717	1.358	1.575	2.028	0.63 x 1.46	7.067	6.90	15000
8998800	CRFX20	5/8	16	0.748	3.150	1.398	1.969	2.362	0.79 x 2.05	8.543	12.79	22600