

# V10 EYE GRAB HOOKS SERIES

---

The V10 Eye Grab Hook is an excellent choice for overhead lifting and also suitable for other applications. The whole chain link is supported by the chain shape groove, keeping optimal chain position - therefore maintaining 100% of its Working Load Limit. It is a reliable choice as it is quenched and tempered before proof testing and meets or exceeds OSHA, Government, NACM, and ASTM specs. This Italian made, Grade 100 Eye Grab Hook is available in a blue powder coat finish.

Applications include chain tightening, tie down, and lifting in industries such as construction, automotive, aircraft and farming.



## FEATURES

- Grade 100
- Premium fine grain alloy steel
- Made in Italy
- Quenched and tempered before proof testing
- Blue powder coat finish
- Meets or exceeds OSHA, Government, NACM, and ASTM specs
- No reduction in working load limit
- Presence of a chain shape groove for optimal chain position

# V10 EYE GRAB HOOKS SERIES

---

## GRADE

- 100

## FINISH

- Blue Powder Coat Finish

## STANDARDS

- Meets or exceeds OSHA, Government, NACM, and ASTM specs

## ATTACHMENT

- Eye

## HEAT TREATMENT

- Quenched and tempered before proof testing

## ORIGIN

- Made in Italy

## HOOK TYPE

- Grab Hook

## APPLICATION

- Overhead Lifting

## MATERIAL

- Premium Fine Grain Alloy Steel



[WWW.KITO.CA](http://www.kito.ca) | 1.888.322.KITO (5486)

All specifications, dimensions and drawings are available at [www.kito.ca](http://www.kito.ca), or call our Customer Service staff for friendly and expert advice on models and options.


2

V10 ALLOY CHAIN  
ACCESSORIES

# V10 EYE GRAB HOOKS SERIES

---

## DIAGRAM DRAWINGS

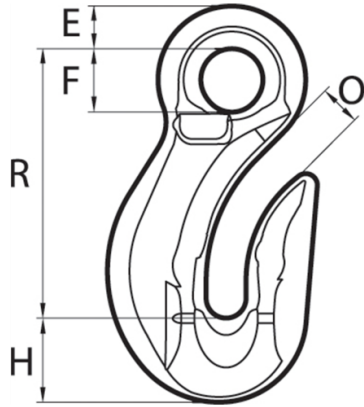

# V10 EYE GRAB HOOKS SERIES

## PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim E	Dim F	Dim H	Dim O	Dim R	Lbs. Per Ea.	Working Load Limit (Lbs.)
8927100	CDX06	7/32	6	0.374	0.492	0.689	0.276	2.205	0.51	2700
8927200	CDX08	9/32 - 5/16	7 - 8	0.512	0.650	0.925	0.374	2.933	1.19	5700
8927400	CDX10	3/8	10	0.630	0.827	1.142	0.472	3.61	2.34	8800
8927600	CDX13	1/2	13	0.807	1.083	1.516	0.610	4.764	5.27	15000
8927700	CDX16	5/8	16	0.984	1.319	1.890	0.728	5.846	9.88	22600
8927810	CDX20	3/4	20	1.063	1.614	2.264	1.024	6.969	14.55	35300
8927900	CDX22	7/8	22	1.299	1.732	2.441	1.024	7.657	19.29	42700