

V10™ SWIVEL SELF-LOCKING HOOK WITH BEARING

Choose a Swivel Self-Locking Hook with Bearing when it comes to complex work environments or precise applications. The bearing allows the hook to rotate freely underneath the load. The swivel eye allows the load to turn without unhooking, so you can be sure it ends up exactly where and how you need it. You'll find more security with the self-locking latch - a unique safety feature that allows the load to be unhooked manually, only when you need it released. This hook meets or exceeds OSHA, Government, NACM, and ASTM specs. Quenched and tempered before proof testing, V10™ fittings' technical features outperform current market standards. All V10™ products are accompanied with a product test certificate.



V10™ SWIVEL SELF-LOCKING HOOK WITH BEARING

GRADE

- 100

FINISH

- Blue Powder Coat Finish

STANDARDS

- Meets or exceeds ASTM A952, NACM, & OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL
- Safety factor 4:1

ATTACHMENT

- Swivel Eye

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Italy

HOOK TYPE

- Swivel Self-Locking Hook (With Bearing)

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

V10™ SWIVEL SELF-LOCKING HOOK WITH BEARING

DIAGRAM DRAWINGS

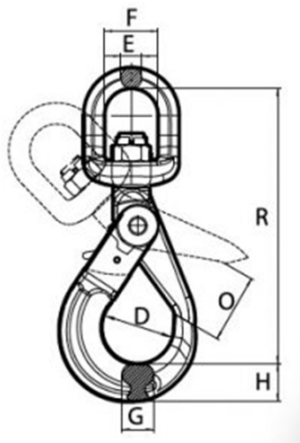

V10™ SWIVEL SELF-LOCKING HOOK WITH BEARING

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim G (in.)	Dim H (in.)	Dim O (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8491100	7/32	6	1.377	0.512	1.377	0.63	0.807	1.102	6.299	1.76	2700
8491200	9/32 - 5/16	7 - 8	1.713	0.512	1.378	0.787	1.024	1.339	7.126	2.43	5700
8491400	3/8	10	2.205	0.630	1.654	0.965	1.181	1.772	8.583	4.41	8800
8491600	1/2	13	2.717	0.787	1.929	1.358	1.575	2.028	10.591	8.82	15000
8491700	5/8	16	3.15	0.945	2.362	1.398	1.969	2.362	12.559	14.99	22600