

PEERLESS® ALLOY OBLONG MASTER LINKS

This Peerless® Alloy Oblong Master Link is welded, heat treated, proof tested and tumble finished. Made in the USA, this product comes self-colored and is approved for overhead lifting.



PEERLESS® ALLOY OBLONG MASTER LINKS

FINISH

- Self-colored

STANDARDS

- Meets or exceeds OSHA, Government, NACM, and ASTM specs

HEAT TREATMENT

- Welded, heat treated, proof tested, and tumble finished

ORIGIN

- Made in USA

APPLICATION


- Overhead Lifting

MATERIAL

- 8620 or 4130 alloy steel

PEERLESS® ALLOY OBLONG MASTER LINKS

DIAGRAM DRAWINGS

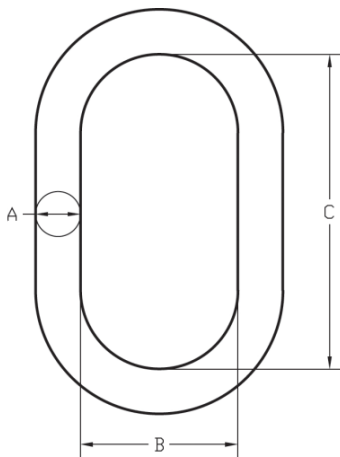

PEERLESS® ALLOY OBLONG MASTER LINKS

PRODUCTS SPECIFICATIONS

Product	Trade Size (in.)	Trade Size mm	Finish	Dim A (in.)	Dim B (in.)	Dim C (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
OMA041	13/32	10	Self-Colored	0.410	1.500	3.000	0.40	3,600
OMA050	1/2	13	Self-Colored	0.500	2.500	5.000	0.85	4,100
OMA063	5/8	16	Self-Colored	0.630	3.000	6.000	1.60	6,100
OMA075	3/4	20	Self-Colored	0.750	2.750	5.500	2.42	13,200
OMA100	1	26	Self-Colored	1.000	3.500	7.000	4.70	22,500
OMA125	1-1/4	32	Self-Colored	1.250	4.380	8.750	9.10	32,500
OMA150	1-1/2	38	Self-Colored	1.500	5.250	10.500	18.50	49,000
OMA175	1-3/4	45	Self-Colored	1.750	6.000	12.000	30.33	73,500
OMA200	2	50	Self-Colored	2.000	7.000	14.000	43.40	88,900
OMA225	2-1/4	57	Self-Colored	2.250	8.000	16.000	53.30	125,200
OMA250	2-1/2	64	Self-Colored	2.500	8.000	16.000	66.70	147,300
OMA275	2-3/4	70	Self-Colored	2.750	9.000	16.000	83.70	187,800