

PEERLESS® INSULATED SWIVEL HOOK

Electrically insulated, the Peerless® Insulated Hook eliminates current flow that can damage hoists and lifting equipment. Free running bearing allows easy work positioning. Use wherever electrical potentials present a hazard. Safe up to 2,000 volts and 2250 F. Made in USA and an impressive Working Load Limit of up to 40,000 lbs.



PEERLESS® INSULATED SWIVEL HOOK

FINISH

- Blue Powder Coat Finish

ATTACHMENT

- Multi-purpose wide opening

ORIGIN

- Made in USA

HOOK TYPE

- Latched and forged hook on free-running bearing
- Uses SKF bearing for free turning.

APPLICATION


- Overhead Lifting

ELECTRICAL INSULATION

- Eliminate electrical interference. Safe up to 2000 volts and 22°F

PEERLESS® INSULATED SWIVEL HOOK

DIAGRAM DRAWINGS

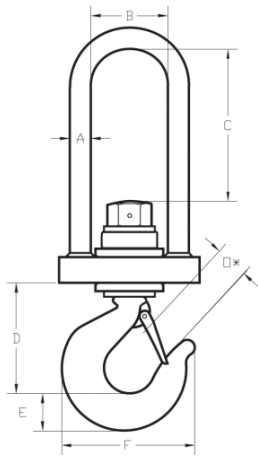

PEERLESS® INSULATED SWIVEL HOOK

PRODUCTS SPECIFICATIONS

Product	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim O (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
ISO12000	1.000	3.000	6.500	4.750	1.810	6.500	1.780	20.0	12000
ISO20000	1.380	4.000	7.630	6.430	2.560	8.680	2.250	50.0	20000
ISO4000	0.630	2.250	4.380	2.750	1.150	4.120	1.120	6.0	4000
ISO40000	1.750	6.000	10.380	9.500	3.630	13.630	3.630	136.0	40000
ISO8000	0.750	2.500	5.000	3.880	1.430	4.940	1.340	8.8	8000