

PEER-LIFT® CLEVIS SLING HOOKS WITH LATCH

The Peer-Lift® Clevis Sling Hook is proof tested at twice the Working Load Limit and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles. The hook latch helps to prevent the load from slipping off the hook. Most commonly used with choker chain slings, connecting and disconnecting this hook to a chain or bracket is made easy by the clevis pin. This Grade 80 clevis sling hook with latch meets or exceeds ASTM A952 and OSHA 1910 standards.



PEER-LIFT® CLEVIS SLING HOOKS WITH LATCH

GRADE

- 80

FINISH

- Black Enamel

STANDARDS

- Meets or exceeds ASTM A952 and OSHA 1910 standards
- Proof tested at twice the working load limit
- Fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Sling Hook with latch
- Full, wide throat (choker hitch)

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

PEER-LIFT® CLEVIS SLING HOOKS WITH LATCH

DIAGRAM DRAWINGS

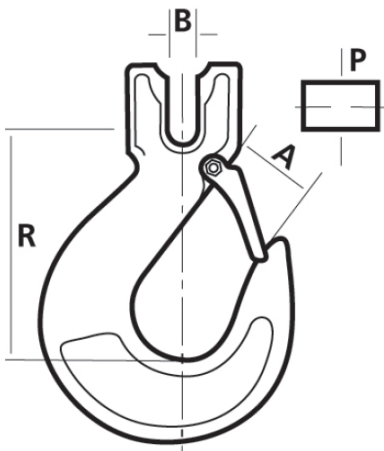

PEER-LIFT® CLEVIS SLING HOOKS WITH LATCH

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim P (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8518280	9/32	7	1.188	0.375	0.354	3.906	1.1	3500
8518480	3/8	10	1.516	0.500	0.516	4.719	3.2	7100
8518680	1/2	13	1.813	0.609	0.625	6.109	5.9	12000
8518780	5/8	16	2.469	0.734	0.703	7.188	7.9	18100