

KUPLEX® KUPLOK®

The Kuplok® Coupling Link is fabricated with premium quality high strength alloy steel and is an essential component of mechanically coupled slings. It is primarily used to assemble chain legs to the master link and/or attach eye type fittings. The Kuplok® Coupling Link meets the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100).



KUPLEX® KUPLOK®

GRADE

- 80 and 100

FINISH

- Powder coated red

STANDARDS

- Meet the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100)

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Canada

APPLICATION


- Overhead Lifting

MATERIAL

- Premium quality, high strength alloy steel

KUPLEX® KUPLOK®

DIAGRAM DRAWINGS

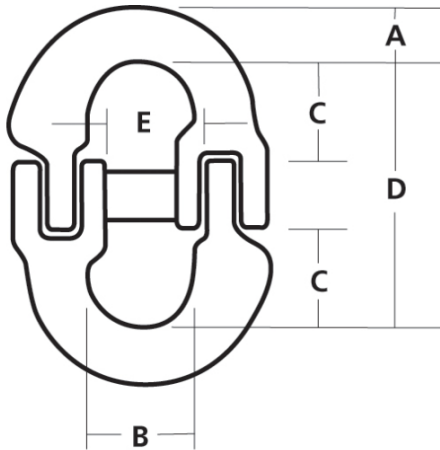

KUPLEX® KUPLOK®

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Grade	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
594200400	9/32	7	80	0.375	0.688	0.625	1.813	0.500	0.3	3500
594200601	3/8	10	80	0.500	1.000	0.938	2.375	0.750	0.6	7100
594200801	1/2	13	80	0.625	1.250	1.375	3.250	1.000	1.5	12000
594201001	5/8	16	80	0.750	1.500	1.688	4.00	1.250	2.4	18100
594201201	3/4	20	80	0.938	1.750	2.000	4.750	1.625	3.6	28300