

PEERLESS® ALLOY ROUND RINGS

Suitable for a variety of applications, this Peerless® Alloy Round Ring has the ability to hold 60,000 lbs. Heat treated, proof tested and tumble finished, this round ring is made in the USA and certified to OSHA and ASME standards.



PEERLESS® ALLOY ROUND RINGS

FINISH

- Self-colored

STANDARDS

- Certified to OSHA and ASME standards

ORIGIN

- Made in USA

APPLICATION


- Custom Lifting

MATERIAL

- 8620 or 4130 alloy steel

PEERLESS® ALLOY ROUND RINGS

DIAGRAM DRAWINGS

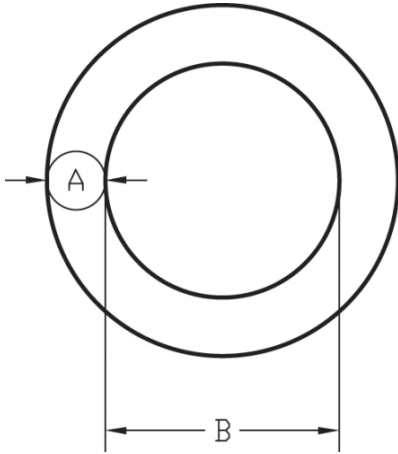

PEERLESS® ALLOY ROUND RINGS

PRODUCTS SPECIFICATIONS

Product	Trade Size (in.)	Trade Size mm	Dim A (in.)	Dim B (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
RMA050	1/2	13	0.500	2.500	0.58	4300
RMA063	5/8	16	0.630	3.000	1.00	5650
RMA075	3/4	20	0.750	4.000	2.00	8600
RMA088	7/8	22	0.880	4.000	2.83	13200
RMA100	1	26	1.000	4.000	3.40	19000
RMA125	1-1/4	32	1.250	5.000	7.50	24000
RMA150	1-1/2	38	1.500	6.000	12.00	37000
RMA175	1-3/4	45	1.750	7.000	20.00	49000
RMA200	2	50	2.000	8.000	29.00	60000