

# PEER-LIFT® SCREW PIN ANCHOR SHACKLES

## Forged Alloy Body and Pin

The Peer-Lift® Alloy Screw Pin Anchor Shackle has a forged alloy body & pin. For applications where frequent pin removal is needed. Hot dipped galvanized to ASTM A153 and proof load is at 2.2 times the Working Load Limit.



# PEER-LIFT® SCREW PIN ANCHOR SHACKLES

## GRADE

- Type IVA, Grade B, Class 2

## FINISH

- Hot Dipped Galvanized to ASTM A153

## STANDARDS

- Meet ASME B30.26 Requirements
- Meets or exceeds FED SPEC RR-C-271 requirements

## ATTACHMENT

- Screw Pin Shackle

## APPLICATION


- Overhead Lifting

## MATERIAL

- Forged Alloy Body and Pin

# PEER-LIFT® SCREW PIN ANCHOR SHACKLES

## DIAGRAM DRAWINGS

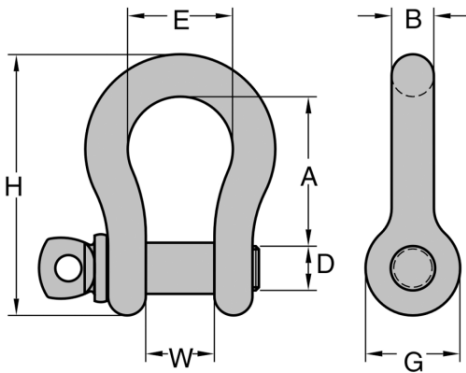

# PEER-LIFT® SCREW PIN ANCHOR SHACKLES

## PRODUCTS SPECIFICATIONS

Product	Trade Size (in.)	Dim A (in.)	Dim B (in.)	Pin Diameter (D) (in)	Dim E (in.)	Dim G (in.)	Dim W (in.)	Quantity Per Pkg.	Lbs. Per Ea.	Working Load Limit (Tons)
8058103	3/16	0.875	0.18	1/4	0.56	0.62	0.375	5	0.1	1/2
8058203	1/4	1.125	0.24	5/16	0.75	0.875	0.47	5	0.1	3/4
8058303	5/16	1.25	0.3	3/8	0.81	1	0.53	5	0.2	1-1/4
8058403	3/8	1.435	0.36	7/16	0.94	1.12	0.655	5	0.3	2
8058503	1/2	1.875	0.48	5/8	1.19	1.38	0.815	5	0.7	3-1/3
8058603	5/8	2.405	0.59	3/4	1.5	1.88	1.065	5	1.4	5
8058703	3/4	2.825	0.71	7/8	1.75	2.12	1.25	5	2.4	7
8058803	7/8	3.31	0.83	1	2	2.37	1.5	1	3.6	9-1/2
8058903	1	3.75	0.95	1-1/8	2.31	2.62	1.69	1	5.1	12-1/2
8059003	1-1/4	4.69	1.19	1-3/8	2.88	3.25	2.03	1	9.5	18
8059103	1-1/2	5.75	1.42	1-5/8	3.38	3.75	2.375	1	17.7	30
8059203	7/16	1.685	0.42	1/2	1.06	1.25	0.72	5	0.5	2-2/3
8059403	1-3/4	7	1.66	2	4.5	4.5	2.875	1	30.4	40
8059503	2	7.75	1.9	2-1/4	5.25	5.25	3.25	1	45	50