

TRANSPORT (G70) CLEVIS GRAB HOOK

Quenched, tempered, and proof tested -- this hook can handle a lot when it comes to cargo control. It's easily attached and detached from the chain by the clevis pin and is available in both a self-coloured or yellow zinc finish for that added corrosion resistance. It meets DOT/CVSA/CCMTA requirements. NOT for overhead lifting.



TRANSPORT (G70) CLEVIS GRAB HOOK

GRADE

- 70

FINISH

- Self-colored or yellow zinc

STANDARDS

- Meets DOT/CVSA/CCMTA requirements

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Grab Hook

APPLICATION


- Cargo Control

MATERIAL

- Forged Alloy Steel

TRANSPORT (G70) CLEVIS GRAB HOOK

DIAGRAM DRAWINGS

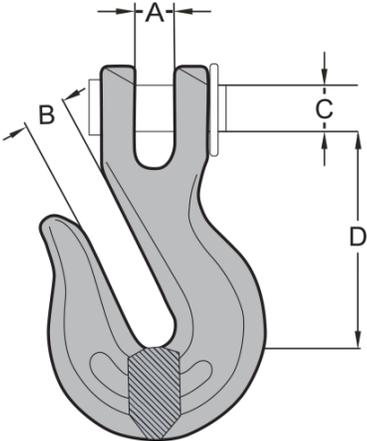

TRANSPORT (G70) CLEVIS GRAB HOOK

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Finish	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Quantity Per Pkg.	Lbs. Per Ea.	Working Load Limit (Lbs.)	Working Load Limit (kg)
8022215	1/4	Self Colored	0.36	0.40	0.38	1.97	10	0.40	3150	1429
8022255	1/4	Yellow Zinc	0.36	0.40	0.38	1.97	10	0.40	3150	1429
8022315	5/16	Self Colored	0.38	0.44	0.44	2.34	10	0.72	4700	2132
8022355	5/16	Yellow Zinc	0.38	0.44	0.44	2.34	10	0.72	4700	2132
8022415	3/8	Self Colored	0.45	0.50	0.47	2.66	10	1.07	6600	2994
8022455	3/8	Yellow Zinc	0.45	0.50	0.47	2.66	10	1.07	6600	2994
8022615	1/2	Self Colored	0.75	0.62	0.63	3.28	5	2.16	11300	5127
8022655	1/2	Yellow Zinc	0.75	0.62	0.63	3.28	5	2.16	11300	5127
8022855	5/8	Yellow Zinc	0.91	0.78	0.75	3.78	5	3.75	15800	7166