

KUPLEX® KUPLERS®

This Canadian made Kuplex® Kupler® acts as a connection device between Master Links and Chain on all multiple leg Kuplex II Chain Slings. On single leg assemblies, it can be used in lieu of the popular Kuplex II Kuplink. Resembling a shackle in appearance, the Kupler provides a high strength, high integrity connection, when used to connect a special attachment to the alloy chain assembly. It meets the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100). Choose a self-colored or a red powder coat finish.



KUPLEX® KUPLERS®

GRADE

- 80 and 100

FINISH

- Self- colored or powder coated red

STANDARDS

- Meet the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100)

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Canada

APPLICATION


- Overhead Lifting

MATERIAL

- Premium quality, high strength alloy steel

KUPLEX® KUPLERS®

DIAGRAM DRAWINGS

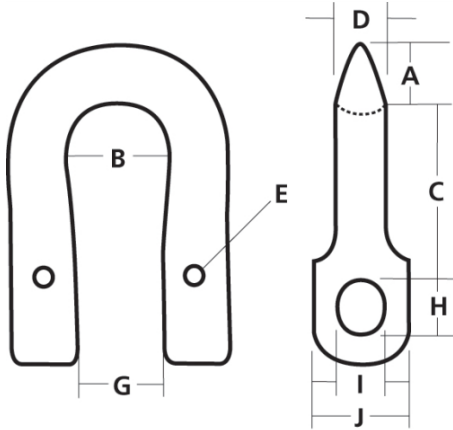

KUPLEX® KUPLERS®

PRODUCTS SPECIFICATIONS

Product	ID #	Chain Size Inches	Chain Size mm	Grade	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Dim G (in.)	Dim H (in.)	Dim I (in.)	Dim J (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
598100024	K-24	3/4	20	80	1.000	1.938	3.406	0.813	0.313	1.594	1.219	1.000	1.750	4.4	28300
598100025	K-25	7/8	22	80	1.125	2.250	3.875	0.938	0.375	1.844	1.281	1.063	2.000	6.3	34200
598150020	K-20	9/32	7	80	0.438	0.813	1.313	0.313	0.125	0.719	0.406	0.344	0.625	0.7	3500
598150021	K-21	3/8	10	80	0.594	1.063	1.813	0.438	0.156	0.875	0.563	0.469	0.875	0.7	7100
598150022	K-22	1/2	13	80	0.750	1.313	2.563	0.563	0.188	1.094	0.750	0.656	1.125	1.3	12000
598150023	K-23	5/8	16	80	0.938	1.625	3.000	0.688	0.250	1.344	0.938	0.813	1.500	2.4	18000
599100026	K-26	1	26	63	1.250	2.688	4.250	1.063	---	2.000	1.219	1.094	2.375	6.5	35900
599100028	K-28	1-1/4	32	63	1.500	3.500	5.125	1.313	---	2.281	1.500	1.344	2.875	11.4	56100