

# PEER-LIFT® CLEVIS SELF-LOCKING HOOKS

The Peer-Lift® Clevis Self-locking Hook features a positive locking latch which ensures safety and security during lifts and while under load. Proof tested at twice the Working Load Limit and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles, the Peer-Lift® Clevis Self-locking Hook has proven itself to meet or exceed ASTM A952 and OSHA 1910 standards.



# PEER-LIFT® CLEVIS SELF-LOCKING HOOKS

---

## GRADE

- 80

## FINISH

- Black Enamel

## STANDARDS

- Meets or exceeds ASTM A952 and OSHA 1910 standards
- Proof tested at twice the Working Load Limit
- Fatigue tested at 1.5 times the working load limit for 20,000 cycles

## ATTACHMENT

- Clevis

## HEAT TREATMENT

- Quenched and tempered before proof testing

## HOOK TYPE

- Self-Locking Hook

## APPLICATION


- Overhead Lifting

## MATERIAL

- Premium Fine Grain Alloy Steel

# PEER-LIFT® CLEVIS SELF-LOCKING HOOKS

## DIAGRAM DRAWINGS

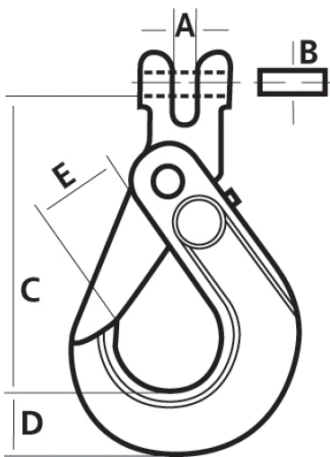

# PEER-LIFT® CLEVIS SELF-LOCKING HOOKS

## PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8598280	9/32	7	0.380	0.390	4.800	0.980	1.270	1.8	3500
8598480	3/8	10	0.500	0.470	6.040	1.310	1.800	3.8	7100
8598680	1/2	13	0.600	0.630	7.340	1.640	2.110	7.1	12000
8598880	5/8	16	0.730	0.790	8.460	2.050	2.520	13.8	18100