

V10™ CLEVIS FOUNDRY HOOKS

The V10™ Clevis Foundry Hook offers a unique wide throat opening to accommodate a variety of attachments. Approved for overhead lifting, it is mainly used in a workshop or factory that produces metal castings. The V10™ Clevis Foundry Hook is engineered to meet or exceed OSHA, Government, NACM, and ASTM standards. All V10™ products are accompanied with a product test certificate.



V10™ CLEVIS FOUNDRY HOOKS

GRADE

- 100

FINISH

- Blue Powder Coat Finish

STANDARDS

- Safety factor 4:1
- Meets or exceeds ASTM A952 & OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Italy

HOOK TYPE

- Foundry Hook

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

V10™ CLEVIS FOUNDRY HOOKS

DIAGRAM DRAWINGS

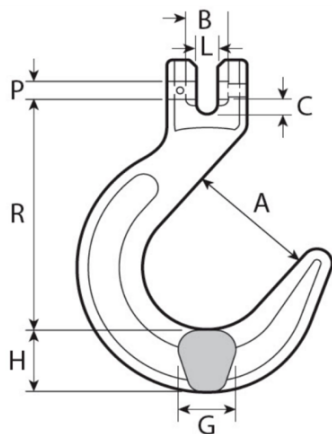

V10™ CLEVIS FOUNDRY HOOKS

PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim G (in.)	Dim H (in.)	Dim P x L (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8487100	CYFX06	7/32	6	2.106	0.335	0.256	0.866	1.024	0.295 x 0.689	3.583	1.42	3100
8487200	CYFX07	9/32	7	2.52	0.394	0.453	1.024	1.22	0.354 x 0.886	4.74	2.4	4300
8487300	CYFX08	5/16	8	2.52	0.394	0.453	1.024	1.22	0.394 x 0.886	4.47	2.43	5700
8487400	CYFX10	3/8	10	2.992	0.512	0.591	1.181	1.339	0.512 x 1.240	5.157	3.84	8800
8487600	CYFX13	1/2	13	3.504	0.669	0.689	1.575	1.752	0.630 x 1.654	5.827	8.3	15000
8487700	CYFX16	5/8	16	3.976	0.748	0.846	1.772	1.988	0.827 x 2.028	7.815	12.68	22600