

KUPLEX® MASTER KUPLINKS

The Master Kuplink® is an optimum choice of chain-to-master-link connections. In addition to the streamline characteristics of the Kuplink®, there is a definite advantage to field assembly since other coupling devices are unnecessary. Meets the latest guidelines of NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100).



KUPLEX® MASTER KUPLINKS

GRADE

- 80 and 100

FINISH

- Powder coated red

STANDARDS

- Meet the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100)

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Canada

APPLICATION


- Overhead Lifting

MATERIAL

- Premium quality, high strength alloy steel

KUPLEX® MASTER KUPLINKS

DIAGRAM DRAWINGS

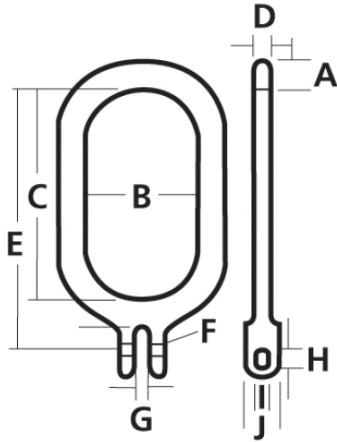

KUPLEX® MASTER KUPLINKS

PRODUCTS SPECIFICATIONS

Product	ID #	Chain Size Inches	Chain Size mm	Grade	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim G (in.)	Dim H (in.)	Dim I (in.)	Dim J (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
598300015	K-15	3/4	20	80	1.250	4.000	8.000	0.875	10.188	0.313	0.813	1.219	1.000	1.750	11.6	28300
598350011	K-11	9/32	7	100	0.750	3.000	6.000	0.500	7.125	0.125	0.313	0.406	0.344	0.625	1.9	4300
598350012	K-12	3/8	10	100	0.750	3.000	6.000	0.500	7.250	0.156	0.438	0.563	0.469	0.875	2.7	8800
598350013	K-13	1/2	13	100	0.938	3.000	6.000	0.688	7.563	0.188	0.563	0.750	0.656	1.125	4.4	15000
598350014	K-14	5/8	16	100	1.125	4.000	8.000	0.875	9.938	0.250	0.688	0.938	0.813	1.500	8.2	22600