

PEER-LIFT® EYE SELF-LOCKING HOOKS

The Peer-Lift® Eye Self-locking Hook features a positive locking latch that ensures safety and security during lifts and while under load. Proof tested at twice the Working Load Limit and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles, the Peer-Lift® Eye Self-locking Hook has proven itself to meet or exceed ASTM A952 and OSHA 1910 standards.



PEER-LIFT® EYE SELF-LOCKING HOOKS

GRADE

- 80

FINISH

- Black Enamel

STANDARDS

- Meets or exceeds ASTM A952 and OSHA 1910 standards
- Proof tested at twice the working load limit
- Fatigue tested at 1.5 times the working load limit for 20,000 cycles

ATTACHMENT

- Eye

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Self-Locking Hook

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

PEER-LIFT® EYE SELF-LOCKING HOOKS

DIAGRAM DRAWINGS

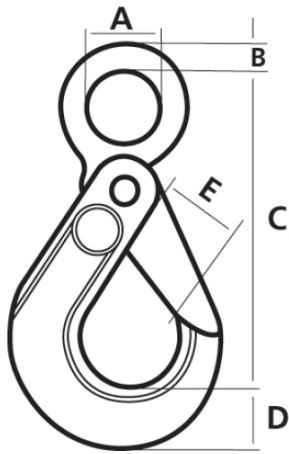

PEER-LIFT® EYE SELF-LOCKING HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8597280	9/32	7	0.940	0.450	5.270	0.980	1.270	1.8	3500
8597480	3/8	10	1.260	0.590	6.710	1.310	1.800	3.7	7100
8597680	1/2	13	1.570	0.790	8.200	1.640	2.110	6.8	12000
8597780	5/8	16	1.970	0.910	10.000	2.050	2.520	13.9	18100