

V10™ CLEVIS SLING HOOKS WITH LATCH

The V10™ Clevis Sling Hook features a tip supported hook latch which prevents the load from slipping out of the hook. Most commonly used with choker chain slings, the V10™ Clevis Sling Hook is approved for overhead lifting. Quenched and tempered before proof testing, it meets or exceeds OSHA, Government, NACM, and ASTM specs. All V10™ products are accompanied with a product test certificate.



V10™ CLEVIS SLING HOOKS WITH LATCH

GRADE

- 100

FINISH

- Blue Powder Coat Finish

STANDARDS

- Meets or exceeds ASTM A952, NACM, OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL
- Safety factor 4:1

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Italy

HOOK TYPE

- Sling Hook Tip supported hook latch for added safety

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

V10™ CLEVIS SLING HOOKS WITH LATCH

DIAGRAM DRAWINGS

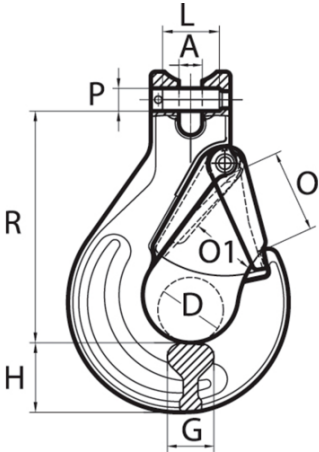

V10™ CLEVIS SLING HOOKS WITH LATCH

PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim D (in.)	Dim G (in.)	Dim H (in.)	Dim O (in.)	Dim O1 (in.)	Dim P x L (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8418100	CBX06SF	7/32	6	0.276	0.709	0.65	0.787	0.984	0.748	0.29 x 0.65	2.717	0.6	2700
8418200	CBX07SF	9/32 - 5/16	7 - 8	0.354	0.984	0.748	1.102	1.26	1.024	0.38 x 0.91	3.72	1.35	5700
8418400	CBX10SF	3/8	10	0.453	1.181	0.984	1.299	1.535	1.22	0.49 x 1.16	4.291	2.47	8800
8418600	CBX13SF	1/2	13	0.571	1.496	1.181	1.575	1.89	1.535	0.63 x 1.46	5.315	4.52	15000
8418700	CBX16SF	5/8	16	0.689	1.732	1.457	1.85	2.165	1.772	0.79 x 2.05	6.102	7.5	22600
8418800	CBX20SF	3/4	20	0.906	2.047	2.008	1.969	2.402	2.087	0.94 x 2.87	7.205	13.8	35300
8418900	CBX22SF	7/8	22	0.965	2.362	1.969	2.402	2.795	2.402	1.06 x 2.80	8.346	19.32	42700