

# 316 STAINLESS STEEL V-NOTCH COUPLING LINKS

---

The 316 Stainless Steel V-notched Alloy Coupling Link, USA made, is electropolished and ready for welding. It is made from un-heat treated alloy components 8620 or 4130 alloy steel and is pre-notched for your convenience. Designed for custom lifting, this Grade 50 coupling link will meet your needs. It is certified to OSHA and ASME standards. NOT for overhead lifting.



# 316 STAINLESS STEEL V-NOTCH COUPLING LINKS

---

## GRADE

- 50

## STANDARDS

- Certified to OSHA and ASME standards

## APPLICATION

- Custom Lifting

## FINISH

- Welded, Electropolished, and proof tested

## ORIGIN


- Made in USA

## MATERIAL

- 316 Stainless Steel

# 316 STAINLESS STEEL V-NOTCH COUPLING LINKS

## DIAGRAM DRAWINGS

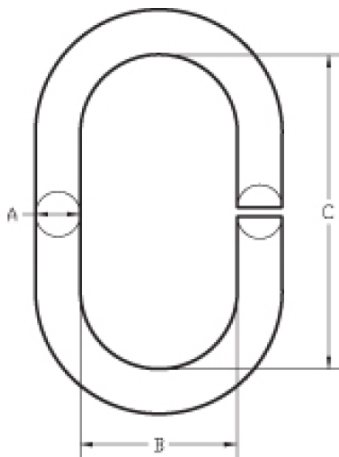

# 316 STAINLESS STEEL V-NOTCH COUPLING LINKS

## PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Lbs. Per Ea.
CS031	3/16	5.5	0.310	0.630	1.250	0.10
CS038	9/32	7	0.380	0.880	1.500	0.16
CS044	5/16	8	0.440	0.940	1.750	0.25
CS050	3/8	10	0.500	1.000	2.000	0.36
CS063	1/2	13	0.630	1.500	2.500	0.74
CS075	5/8	16	0.750	1.500	3.000	1.21
CS088	3/4	20	0.880	2.000	3.500	2.010
CS100	7/8	22	1.000	2.250	4.500	3.170
CS125	1	26	1.250	2.500	5.000	5.62