

# V10™ EYE SLING HOOKS WITH LATCH

---

The V10™ Eye Sling Hook features a tip supported hook latch which prevents the load from slipping out of the hook. Most commonly used with choker chain slings, the V10™ Eye Sling Hook is approved for overhead lifting. Quenched and tempered before proof testing, it meets or exceeds OSHA, Government, NACM, and ASTM specs. All V10™ products are accompanied with a product test certificate.



# V10™ EYE SLING HOOKS WITH LATCH

---

## GRADE

- 100

## FINISH

- Blue Powder Coat Finish

## STANDARDS

- Meets or exceeds ASTM A952, NACM, OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL
- Safety factor 4:1

## ATTACHMENT

- Eye

## HEAT TREATMENT

- Quenched and tempered before proof testing

## ORIGIN

- Made in Italy

## HOOK TYPE

- Sling Hook tip supported hook latch for added safety

## APPLICATION


- Overhead Lifting Commonly used with choker chain slings

## MATERIAL

- Premium Fine Grain Alloy Steel

# V10™ EYE SLING HOOKS WITH LATCH

## DIAGRAM DRAWINGS

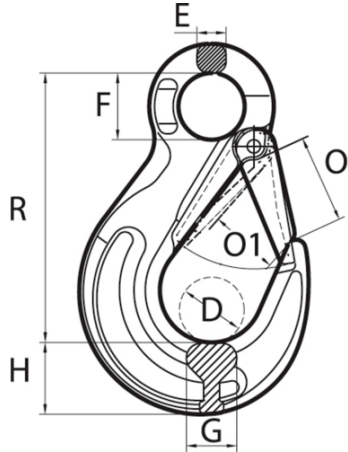

# V10™ EYE SLING HOOKS WITH LATCH

## PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim G (in.)	Dim H (in.)	Dim O (in.)	Dim O1 (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8417100	CAX06SF	7/32	6	0.709	0.394	0.787	0.65	0.827	0.984	0.748	3.327	0.73	2700
8417200	CAX08SF	9/32 - 5/16	7 - 8	0.945	0.433	0.984	0.748	1.063	1.26	0.984	4.173	1.23	5700
8417400	CAX10SF	3/8	10	1.181	0.63	1.339	1.024	1.299	1.575	1.22	5.157	2.65	8800
8417600	CAX13SF	1/2	13	1.496	0.748	1.693	1.299	1.654	1.89	1.535	6.457	5.18	15000
8417700	CAX16SF	5/8	16	1.732	0.984	1.969	1.575	1.969	2.165	1.772	7.185	8.2	22600
8417800	CAX20SF	3/4	20	2.087	1.063	2.165	1.89	2.126	2.402	2.126	8.071	13.12	35300
8417900	CAX22SF	7/8	22	2.362	1.142	2.362	1.969	2.402	2.795	2.402	8.858	17.35	42700