

PEERLESS® ALLOY PEAR SHAPE MASTER LINKS

The Peerless® Alloy Pear Shape Master link is welded, heat-treated, proof tested and tumble finished. This link can be used in most oblong master link applications. Made in USA and self-colored.



PEERLESS® ALLOY PEAR SHAPE MASTER LINKS

FINISH

- Self-colored

STANDARDS

- Meets or exceeds OSHA, Government, NACM, and ASTM specs

HEAT TREATMENT

- Welded, heat treated, proof tested, and tumble finished

ORIGIN

- Made in USA

APPLICATION


- Overhead Lifting

MATERIAL

- 8620 or 4130 alloy steel

PEERLESS® ALLOY PEAR SHAPE MASTER LINKS

DIAGRAM DRAWINGS

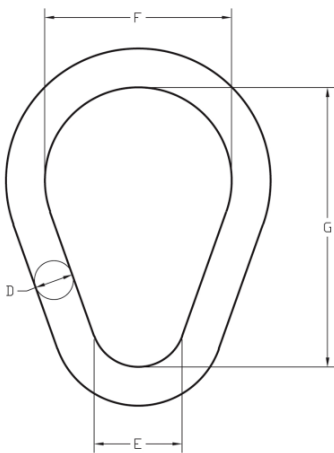

PEERLESS® ALLOY PEAR SHAPE MASTER LINKS

PRODUCTS SPECIFICATIONS

Product	Trade Size (in.)	Trade Size mm	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim G (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
PMA050	1/2	13	0.500	1.500	3.000	6.000	1.00	4100
PMA063	5/8	16	0.630	1.500	3.000	6.000	1.50	6600
PMA075	3/4	20	0.750	1.750	3.000	6.000	2.20	13200
PMA100	1	26	1.000	2.500	4.000	8.000	5.10	22500
PMA125	1-1/4	32	1.250	3.000	6.000	9.000	9.50	32500
PMA150	1-1/2	38	1.500	5.500	7.000	10.500	16.20	49000
PMA175	1-3/4	45	1.750	4.000	7.000	12.000	24.40	73500
PMA200	2	50	2.000	4.000	7.000	14.000	42.66	88900