

PEERLESS® STANDARD ALLOY FOUNDRY SORTING HOOKS

The Peerless® Standard Alloy Foundry Sorting Hook is ideally used for foundry and industrial sorting applications. This hook also comes in a short version.



PEERLESS® STANDARD ALLOY FOUNDRY SORTING HOOKS

FINISH

- Self-colored or blue-grey powder coat finish

STANDARDS

- Certified to OSHA and ASME standards

ATTACHMENT

- Eye

ORIGIN

- Made in USA

HOOK TYPE

- Foundry Sorting Hook

APPLICATION


- Custom Lifting

MATERIAL

- 8620 or 4130 alloy Steel

PEERLESS® STANDARD ALLOY FOUNDRY SORTING HOOKS

DIAGRAM DRAWINGS

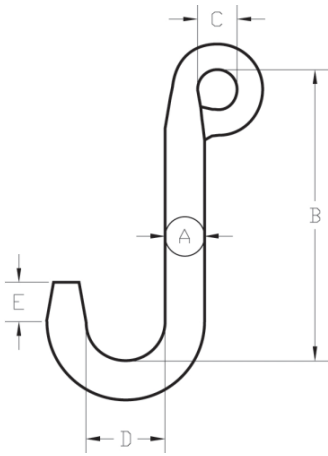

PEERLESS® STANDARD ALLOY FOUNDRY SORTING HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
FSA050	9/32	0.500	6.000	0.750	2.500	0.750	0.75	500
FSA063	9/32	0.630	8.500	0.750	3.500	1.50	1.40	800
FSA075	9/32	0.750	8.500	0.750	3.500	1.500	2.000	1300
FSA081	3/8	0.810	8.500	0.880	3.500	1.500	2.67	1600
FSA100	3/8	1.000	8.500	1.000	4.000	1.750	3.70	2500
FSA113	3/8	1.130	8.500	1.000	4.000	2.000	5.00	3500
FSA125	1/2	1.250	8.500	1.250	4.000	2.000	7.00	4500
FSA150	1/2	1.500	8.500	1.250	5.000	1.500	9.50	6000