

PEER-LIFT® SWIVEL SELF-LOCKING HOOKS

The versatile Peer-Lift® Swivel Self-locking Hook features a swiveling collar allowing for 360 degree hook rotation. Its positive locking latch ensures safety and security during lifts and while under load. Proof tested at twice the Working Load Limit and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles, the Peer-Lift® Swivel Self-locking Hook has proven itself to meet or exceed ASTM A952 and OSHA 1910 standards.



PEER-LIFT® SWIVEL SELF-LOCKING HOOKS

GRADE

- 80

FINISH

- Black Enamel

STANDARDS

- Meets or exceeds ASTM A952 and OSHA 1910 standards
- Proof tested at twice the Working Load Limit
- Fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles

ATTACHMENT

- Eye Swivel

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Self-Locking Hook

APPLICATION


- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel

PEER-LIFT® SWIVEL SELF-LOCKING HOOKS

DIAGRAM DRAWINGS

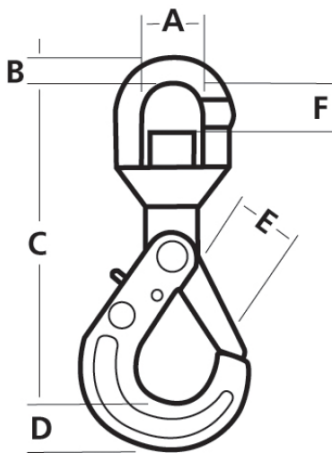

PEER-LIFT® SWIVEL SELF-LOCKING HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Dim E (in.)	Dim F (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8599280	9/32	7	1.380	0.470	7.000	0.980	1.270	1.000	2.6	3500
8599480	3/8	10	1.570	0.590	8.670	1.310	1.800	1.300	5.1	7100
8599680	1/2	13	1.890	0.770	10.940	1.620	2.130	1.630	9.7	12000
8599780	5/8	16	2.360	0.860	13.130	2.050	2.520	2.050	18.4	18100