

# V10™ EYE GRAB HOOKS

---

For use in chain tightening, tie down, or lifting applications, the V10™ Eye Grab Hook is your ideal choice. With the entire chain link supported by the chain cradle, 100% of its Working Load Limit is distributed evenly throughout the hook. The V10™ Eye Grab Hook is engineered to meet or exceed OSHA, Government, NACM, and ASTM standards. All V10™ products are accompanied with a product test certificate.



# V10™ EYE GRAB HOOKS

---

## GRADE

- 100

## FINISH

- Blue Powder Coat Finish

## STANDARDS

- Safety factor 4:1
- Meets or exceeds ASTM A952 and OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL

## ATTACHMENT

- Eye

## HEAT TREATMENT

- Quenched and tempered before proof testing

## ORIGIN

- Made in Italy

## HOOK TYPE

- Grab Hook

## APPLICATION


- Overhead Lifting, Chain Tightening, Tie Down

## MATERIAL

- Premium Fine Grain Alloy Steel

# V10™ EYE GRAB HOOKS

## DIAGRAM DRAWINGS

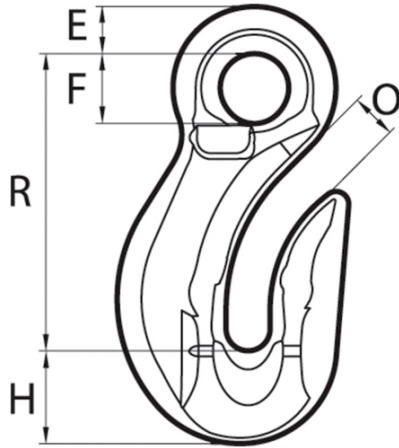

# V10™ EYE GRAB HOOKS

## PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim E (in.)	Dim F (in.)	Dim H (in.)	Dim O (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8427100	CDX06	7/32	6	0.374	0.492	0.689	0.276	2.205	0.51	2700
8427200	CDX08	9/32 - 5/16	7 - 8	0.512	0.65	0.925	0.374	2.933	1.19	5700
8427400	CDX10	3/8	10	0.63	0.827	1.142	0.472	3.61	2.34	8800
8427600	CDX13	1/2	13	0.807	1.083	1.516	0.61	4.764	5.27	15000
8427700	CDX16	5/8	16	0.984	1.319	1.89	0.728	5.846	9.88	22600
8427810	CDX20	3/4	20	1.063	1.614	2.264	1.024	6.969	14.55	35300
8427900	CDX22	7/8	22	1.299	1.732	2.441	1.024	7.657	19.29	42700