

ACCOLOY® EYE SLING HOOKS

The Accoloy® Eye Sling Hook, made from premium quality, high strength alloy steel is an excellent choice for overhead lifting. Most commonly used with choker chain slings, the eye attachment provides a safe connection, while the hook - constructed with a large throat opening, provides effortless operation. Available in Grade 80 or 100, this sling hook meets the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100). Choose a self-colored or a red powder coat finish.



ACCOLOY® EYE SLING HOOKS

GRADE

- 80 and 100

FINISH

- Self- colored or powder coated red

STANDARDS

- Meet the latest guidelines of the NACM and ASTM A391/A391M (Grade 80) or ASTM A973/A973M (Grade 100)

ATTACHMENT

- Eye

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in USA

HOOK TYPE

- Sling Hook

APPLICATION


- Overhead Lifting

MATERIAL

- Premium quality, high strength alloy steel

ACCOLOY® EYE SLING HOOKS

DIAGRAM DRAWINGS

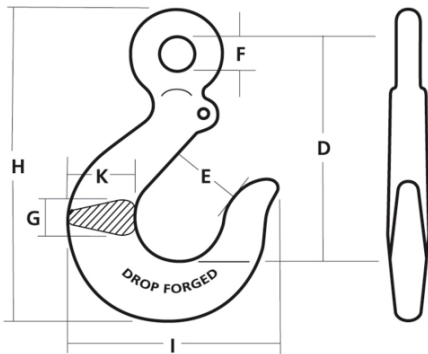

ACCOLOY® EYE SLING HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Grade	Dim D (in.)	Dim E (in.)	Dim F (in.)	Dim G (in.)	Dim H (in.)	Dim I (in.)	Dim K (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
592303084	3/4	20	80	8.875	2.688	1.500	1.500	11.938	7.875	2.313	11.2	28300
592303085	7/8	22	80	10.125	3.000	1.750	1.750	13.750	9.156	2.750	19.6	34200
592303086	1	26	80	11.063	3.3750	2.000	1.875	15.000	10.063	3.000	21.8	47700
592303088	1-1/4	32	80	13.125	4.063	2.250	2.313	18.000	12.313	3.750	44.4	72300
592353080	9/32	7	100	3.813	1.219	0.625	0.688	5.219	3.625	1.063	1.0	4300
592353081	3/8	10	100	5.375	1.625	0.813	0.938	7.250	4.813	1.375	2.5	8800
592353082	1/2	13	100	6.563	2.000	1.031	1.188	8.938	6.063	1.813	5.3	15000
592353083	5/8	16	100	7.750	2.438	1.250	1.313	10.375	7.156	2.125	7.9	22600